G.C.E. (O/L) Examination - 2019

80 - Information and Communication Technology

Calculating final marks

Paper I - 40 marks

Paper II - 60 marks

Final marks - 100 marks

Common Techniques of Marking Answer Scripts.

It is compulsory to adhere to the following standard method in marking answer scripts and

entering marks into the mark sheets.

- 1. Use a red color ball point pen for marking. (Only Chief/Additional Chief Examiner may use a mauve color pen.)
- 2. Note down Examiner's Code Number and initials on the front page of each answer script.
- 3. Write off any numerals written wrong with a clear single line and authenticate the alterations with Examiner's initials.
- 4. Write down marks of each subsection in a and write the final marks of each question as a rational number in a with the question number. Use the column assigned for Examiners to write down marks.

Example:	Question No. 03		
(i)		$\sqrt{}$	$\sqrt{4}$
(ii)		ſ	$\frac{\overline{5}}{\sqrt{3}}$
(iii)		V	$\frac{\overline{5}}{\sqrt{3}}$
(III)		$\sqrt{}$	$\frac{\sqrt{3}}{5}$
03 (i)	$\frac{4}{5}$ + (ii) $\frac{3}{5}$ + (iii) $\frac{3}{5}$	=	10 15

MCQ answer scripts: (Template)

- 1. Mark the correct options on the template according to the Marking Scheme. Cut off the marked windows with a blade. Cut off the cages for Index Number and the number of correct options so as to be able to keep the template correctly on the answer script. Cut off a blank space to the right of each options column to mark the answers. Submit the prepared template to the Chief Examiner for approval.
- 2. Then, check the answer scripts carefully. If there are more than one or no answers marked to a certain question write off the options with a line. Sometimes candidates may have erased an option marked previously and selected another option. In such occasions, if the erasure is not clear write off those options too.
- 3. Place the template on the answer script correctly. Mark the right answers with a ' $\sqrt{}$ ' and the wrong answers with a 'X' against the options column. Write down the number of correct answers inside the cage given under each column. Then, add those numbers and write the number of correct answers in the relevant cage.

Structured essay type and assay type answer scripts:

1. Cross off any pages left blank by candidates. Underline wrong or unsuitable answers. Show areas where marks can be offered with check marks.

- 2. Use the right margin of the overland paper to write down the marks.
- 3. Write down the marks given for each question against the question number in the relevant cage on the front page in two digits. Selection of questions should be in accordance with the instructions given in the question paper. Mark all answers and transfer the marks to the front page, and write off answers with lower marks if extra questions have been answered against instructions.
- 4. Add the total carefully and write in the relevant cage on the front page. Turn pages of answer script and add all the marks given for all answers again. Check whether that total tallies with the total marks written on the front page.

Preparation Of Mark Sheets.

Except for the subjects with a single question paper, final marks of two papers will not be calculated within the evaluation board. Therefore add separate mark sheets for each of the question paper. Enter paper I marks in "Total Marks" column of the mark sheet and write them in words as well. Enter paper II Marks in the "Total Marks" Column and include the relevant details. For the subject 43 Art, marks for Papers I,II and III should be entered numerically in the mark sheets.

For subjects 21 Sinhala language and literature and 22 Tamil Language and literature, paper I marks once entered numerically should be written in words. For the papers II and III enter the detailed marks separately and put the total in each paper in the relevant column.

Final marks for paper I, paper II or paper III should always be rounded up to the nearest whole number and they should never be kept as decimal or half values.

Information and Communication TechnologyMARK SCHEME

Table of Contents

Section	Question	Page
Paper I	1 -40	11
Paper II	1	19
2 000 22	2	22
	3	24
Paper II	4	19 22 24 25
	5	26
	6	27
	7	28

Instructions:

- 1. Acceptable alternatives for a given word or set of words are separated by slashes (/).
- 2. Alternative answers are separated by double slashes (//).
- 3. Marks should **not** be given for a question if **more** than the required number of answers are written by the student.
- 4. $\sqrt{}$ indicates to consider as correct if the student's intention is correct.
- 5. indicates that any credit for this should be given only if A is correct

ශී් ලංකා විභාග දෙපාර්තමේන්තුව இலங்கைப் பரீட்சைத் திணைக்களம் අ.පො.ස.(සා.පෙළ) විභාගය - 2019 க.பொ.த (சா.தர)ப் பரீட்சை - 2019

විෂයය අංකය பாட இலக்கம் பாடம்

80

විෂයය

Information and Communication Technology

I පතුය - පිළිතුරු Iபத்திரம் - விடைகள்

පුශ්න	පිළිතුරු අංකය						
අංකය	விடை இல.	අංකය	விடை இல.	අංකය	விடை இல.	අංකය	விடை இல
வினா		வினா		வினா		வினா	_
இல.		இல.		இல.		இல.	
01.	03	11.	02	21.	03	31.	01
02.	03	12.	04	22.	01	32.	02
03.		13.	01	23.	02	33.	02
04.	02	14.	01	24.	04	34.	02
05.	01	15.	04	25.	04	35.	04
06.	03	16.		26.	04	36.	04
07.	02	17.	01	27.	03	37.	04
08.	03	18.	01	28.	01	38.	01
09.	03	19.	03	29.	04	39.	94
10.	03	20.	01	30.	02	40.	02

විශේෂ උපදෙස් விசேட அறிவுறுத்தல்

එක් පිළිතුරකට ලකුණු ஒரு சரியான விடைக்கு

බැගින් புள்ளி வீதம் 01

මුළු ලකුණු/ மொத்தப் புள்ளிகள் 01×40=40

පහත නිදසුනෙහි දක්වෙන පරිදි බහුවරණ උත්තරපතුයේ අවසාන තීරුවේ ලකුණු ඇතුළත් කරන්න. கீழ் குறிப்பிடப்பட்டிருக்கும் உதாரணத்திற்கு அமைய பல்தேர்வு வினாக்களுக்குரிய புள்ளிகளை <u>பல்தேர்வு</u> வினாப்பத்திரத்தின் இறுதியில் பதிக. **25** 25 25

නිවැරදි පිළිතුරු සංඛ්‍යාව

40

I පතුයේ මුළු ලකුණු

40

Confidential **Department of Examinations**

Paper II (compulsory question)

(i)-----[2] 1. Two examples for information One mark per any of the following. Maximum of two of them. average rainfall maximum rainfall minimum rainfall mode of the rainfall median of the rainfall rainfall variation // no. of rainy days // no. of continuous rainy days rainfall predictions for future total rainfall (ii)------[2] Port label to port name match Two marks for 4-5 correct, one mark for 1-3 correct. Exact spelling important for B, C, D and E. A-Audio \checkmark , B-RJ45, C-HDMI, D-USB, E-VGA(a)-----[1] (iii) Convert 126010 to its octal equivalent 2354₈ // 2354 (b)-----[1] Convert A116 to its binary equivalent 1010 00012 // 1010 0001 (a) ------[1] (iv) Draw a truth table with two columns A and P (b)-----[1] Boolean expression for S The dot is not compulsory. S = X.Y' + X'.Y // $S = X.\overline{Y} + \overline{X}.Y$

(v)[2]
Write down folder names Two marks for 4-5 correct, one mark for 1-3 correct. A – Studies, B – Science , C – Music, D – Photos, E – 2019 ,
(vi)[2]
Formatting task to tool icon matching
Two marks for 3-4 correct, one mark for 1-2 correct.
A-Q, $B-S$, $C-P$, $D-U$
(vii) (a)[1]
Which two fields make the primary key?
Exact spelling important. Ignore case and space defects.
Month SalesRepID
(b)[1]
Most suitable data types for Month and TotalSales fields?
Month: Text TotalSales: Currency

(viii)------[2]

				Match P,	Q,R,S in the f	flowchart to statement numbers
	Two marks for	3-4 correct, on	e mark f	or 1-2 co	rrect.	
	P-1,	Q – 4,	R-3	,	S − 2 ⟨	_
	If the student has correctly selected					nsidered as correct, each question.
(ix)						[2]
						Select proper word for blank
	Two marks for	3-4 correct, on	e mark f	or 1-2 co	rrect.	
	A - pixel,	B – vector,	C – Lo	ssy, D) – GIF	\checkmark
(x)						[2
	[A - Can Gihan se	e Hameed	is a recipie	nt? B – Can Sl	harma see Gihan as a recipient?
	One mark per	each				
	A-T, $B-F$	7				\checkmark

					Match risks to solution
О	ne marl	k for 3-4 cor	ect.		
A	. – P,	B-U,	C-R,	D - T	
ii)					

Any two from the following with **one mark** for each. Explaining is important. **No mark** awarded for just writing *reduce*, *reuse*, *recycle*.

- Reduce Reduce unnecessary purchase/use/accumulation of electronic devices
- Reuse Reuse/sell/donate/repair old electronic devices without discarding
- Recycle Recycle the components in irreparable electronic devices
- (iii) (a)-----[1]

A person wants to protect a spreadsheet in his computer from unauthorized access. The computer is not connected to the Internet. Write one way how he could do this.

using a password (for the computer account / spreadsheet)

(b)-----[1

A person cannot afford to buy licensed spreadsheet software for his computer. Write one thing that he could do.

Any **one** of the following:

- installing open source spreadsheet / LibreOffice Calc / OpenOffice Calc software
- using a free cloud based spreadsheet / Google Sheets software // using cloud computing

			_	_
1	•	1	11	ı
ı	·	,	1.	L

Write down one benefit that the students can obtain through this LMS

Any **one** of the following:

- obtaining study notes / supplementary study material
- getting feedback / results (from teachers)
- online assignment / tutorial submissions
- participating in online quizzes
- participating in discussions / forums // communicating with teachers / students
- getting notices
- studying convenience // less paper work // anytime/anywhere studying // studying at own pace
- learn well due to multi-modal / novel experience

A student wants to include in his essay, a part of the content of a website without intellectual property violations. How can he do it?

Any **one** of the following:

- citing / mentioning the rightful owner and his (her) information
- quoting (with inverted commas) and giving the details of the owner
- referencing / listing of resources from which the information was collected
- obtaining permission from author (and indicating it)


A manager in a Colombo office wants to have a video conference with managers in Jaffna and Matara branches without everybody coming to a single location. Write down the requirements needed in these locations.

Two marks for any **one** of the following. If incomplete, give **one mark**.


- Multimedia computer / laptop and communication software and
- Computer (with audio hardware) and webcam and communication software and Internet
- Video conferencing kit and Internet

-----[1]

An office wants to create a computer network using a hub, three computers (named server, computer A, computer B) and a printer using a star topology. Draw the topology diagram.

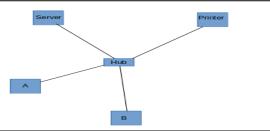

Confidential **Department of Examinations**

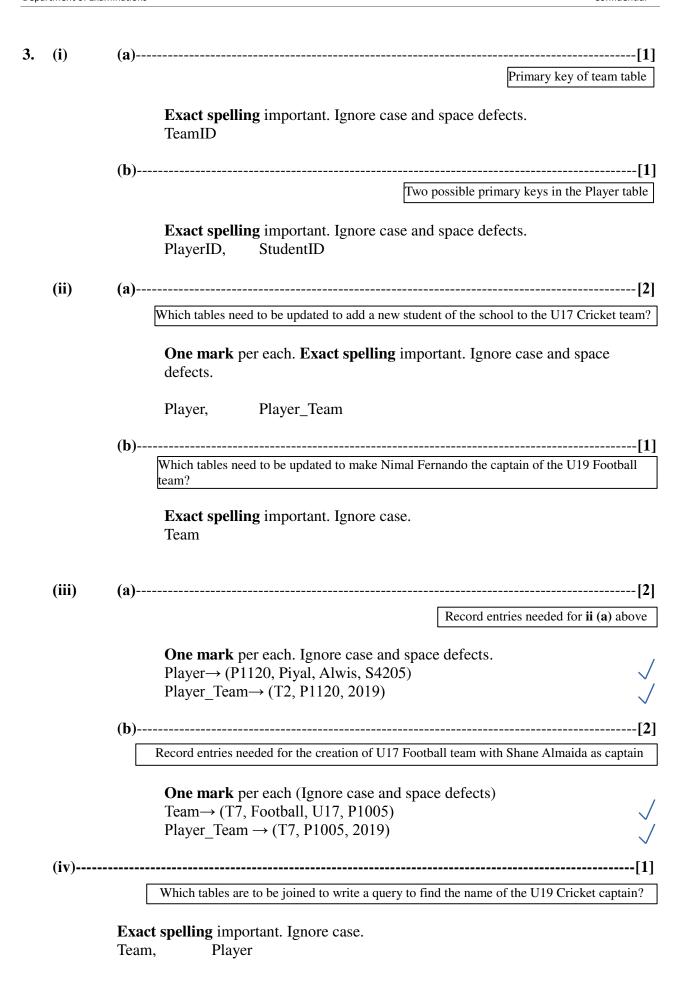

(i)------[3] Match statement labels to terms Three marks for 5-6 correct, Two marks for 3-4 correct, one mark for 1-2 correct. A – DNS Service, B – FTP, C – SMTP, D – lk, E – Search engines, F – @ (ii)------[2] Write down examples for software, languages, etc. Two marks for 3-4 correct, one mark for 1-2 correct. A – Mozilla firefox, B - PHPC - Kompozer, D - Joomla(iii)------[5]

Exact spelling important.

Five marks for 9-10 correct Four marks for 7-8 correct Three marks for 5-6 correct Two marks for 3-4 correct One mark for 1-2 correct 1 head 2 h2

3 img 4 p 5 tr 6 th 7 td 8 ul 9 ol 10 href Select html tags

5. (i) and (ii)------(i) Formula for C43 to calculate average mark for Subject 1 (ii) After copying above formula, write down what will appear in D43 **(i)** (ii) Mark this **only if** (i) correct =average(C3:C42) =average(D3:D42) =average(D42:D3) =average(C42:C3) or Marks [2] [1] (a) and (b)-----(iii) (a) Formula for F3 to compute Kamal's z-score for Subject 1 (b) Copied formula for F42 to compute Kahn's z-score for Subject 1 (a) **(b)** Mark this **only if** (a) correct =(C3-\$C\$43)/\$C\$44=(C42-\$C\$43)/\$C\$44 =(C42-C\$43)/C\$44 (C without preceding \$) or =(C3-C\$43)/C\$44(C with preceding \$) =(\$C42-\$C\$43)/\$C\$44 or =(\$C3-\$C\$43)/\$C\$44 A combination of above Appropriate copied output or Marks [2] [1] -----[2] Formula for I3 to compute final Z score for Kamal using only COUNT and SUM =SUM(F3:H3) / COUNT(F3:H3) _// =SUM(H3:F3) / COUNT(H3:F3) or a combination of above **Do not** give marks for **any other** complicated, long formulas. Formula for I44 to print highest Z score =MAX(I3:I42) // =MAX(I42:I3) Note: Reduce one mark if either the required cell address is given before the equal sign or if the equal sign is missing.


				Terms for SD	DLC related labels
Two mark A – S,	as for 4-5 correct, \mathbf{G} $\mathbf{B} - \mathbf{Q}$,		1-3 correct. D – R,	E – T	
A-5,	Б – Q,	C-1,	D – K,	L-1	
(a)					[
			Write one	input in the scho	ool bookshop system
	Any one of the fol	llowing:			
	item codequantity				
	quantity				
(b)					[
					Write one proces
	Any one of the fol	11			
	•	_			
	computing	g / calculating		neaning) total neaning) total	cost of each iten
(c)	computing	g / calculating g / calculating	(or similar r	neaning) total	bill value
(c)	computingcomputing	g / calculating g / calculating	(or similar r	neaning) total	bill value
(c)	computingcomputing	g / calculating g / calculating	(or similar r	neaning) total	bill value
(c)	• computing • computing • computing Any one of the for • total cost of	g / calculating g / calculating 	(or similar r	neaning) total	bill value
(c)	• computing • computing • computing Any one of the following • total cost of • total bill v	g / calculating g / calculating 	(or similar r	neaning) total	bill value
(c)	• computing • computing • computing Any one of the for • total cost of	g / calculating g / calculating 	(or similar r	neaning) total	bill value
	• computing • computing • computing Any one of the following • total cost of • total bill v	g / calculating g / calculating 	(or similar r	neaning) total	bill value[Write one outpu
	• computing • computing • computing Any one of the for • total cost or • total bill v • final bill	g / calculating g / calculating 	(or similar r	neaning) total	bill value[Write one outpu
	• computing • computing • computing • computing Any one of the foll • total cost of • total bill v • final bill	g / calculating g / calculating llowing: of each item ralue Match syste	or similar r	t related scenario	bill value[Write one outpu
)	• computing • computing • computing • computing Any one of the for • total cost of • total bill v • final bill	g / calculating g / calculating llowing: of each item ralue Match syste	or similar r	t related scenario	bill value[Write one outpu
Two m A – T,	• computing • computing • computing • computing Any one of the for • total cost of • total bill v • final bill	g / calculating g / calculating g / calculating llowing: of each item ralue Match syste ct, one mark	or similar r	t related scenario	write one output

Any **two** of the following with **one mark** each:

- speed // efficiency // doing many tasks simultaneously
- accuracy // reliability // consistency // no errors as in manual systems
- availability // accessibility

6.

- easy for people // never getting tired
- simultaneous usage by multiple users
- quick storage and retrieval
- efficient storage // ability to store lot of data in a small area
- ability to customize / extend easily
- confidentiality // ease of privilege separation // ease of auditing
- ease of duplication / backing up / maintenance

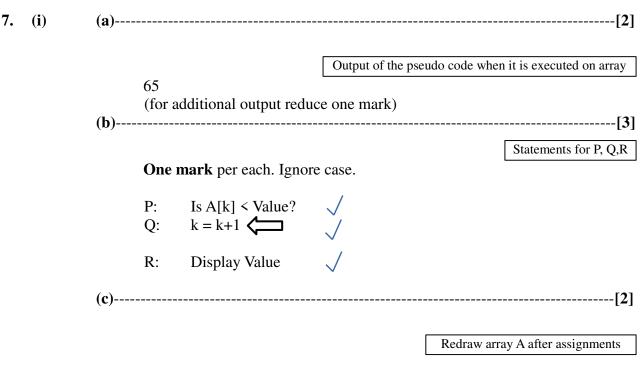

Two marks for 4-5 correct, one mark for 1-3 correct.

A[0]	A[1]	A[2]	A[3]	A[4]
80	45	88	65	72

Statements for P, Q, R

One mark per each. Ignore case.

Is L2=L3? \square P:

Q:

DISPLAY "Scalene triangle" R: